

Hydrogen Sulfide 0.2/a

Order No. 81 01 461


Application Range

Standard Measuring Range:	0.2 to 5 ppm
Number of Strokes n:	10
Time for Measurement:	approx. 5 min
Standard Deviation:	± 5 to 10 %
Color Change:	white → pale brown

Ambient Operating Conditions

Temperature:	10 to 30 °C
Absolute Humidity:	3 to 15 mg H ₂ O / L

Reaction Principle



Cross Sensitivity


Sulfur dioxide and hydrochloric acid in the TLV range do not interfere.



Northside Sales, Co.

Safety & Industrial Products

800-467-9005

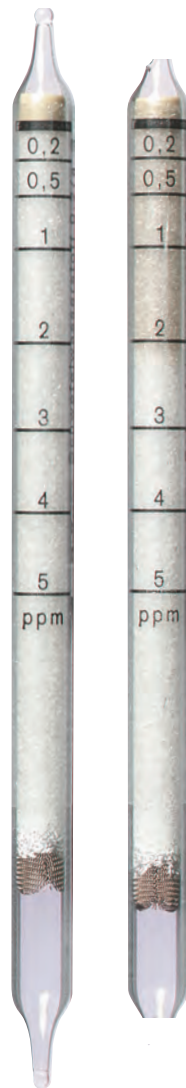

ST-192-2001