


## BEAMER<sup>®</sup> TROLLEY ANCHOR

ANCHORAGE CONNECTOR

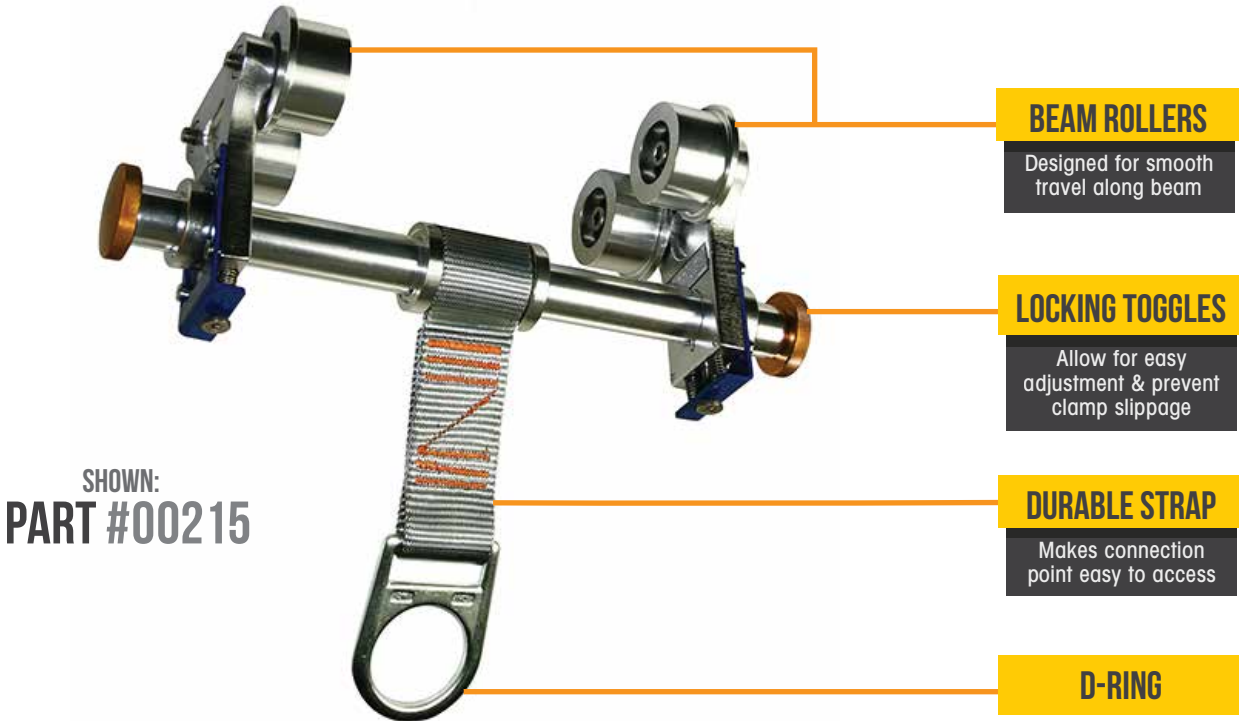

### FEATURES & BENEFITS

- Trails along with user during work
- Intended for installation to steel I or H beams, and specially designed with rollers for smooth travel along the beam
- Compatible with a wide range of beam dimensions
- Locking toggles allow for easy adjustment and eliminate risk of accidental clamp slippage
- Can be used overhead or at foot level
- Lightweight and durable
- Convenient adjustability

# SPECIFICATIONS

## STANDARDS:

OSHA 1926 Subpart M & 1910  
ANSI Z359.18-17 & A10.32-12  
Type A Anchorage Connector

## MATERIALS:

Stainless Steel, Aluminum, Nickel,  
Plated Steel, and Polyester

## WORKER CAPACITY:

130-420 lbs.

## PERFORMANCE:

- Maximum Users: 1
- 5,000 lb. MBS (Minimum Breaking Strength)
- Maximum Flange Thickness: 9/10"

## NOTES:

- Minimum service temperature: -30°F
- Can be used overhead or at foot level with appropriate big boss lanyard
- Anchor must be installed so no risk exists for it to come off of beam
- Never use in vertical applications; for use in steel I or H beams only

PART #	DESCRIPTION	WEIGHT
00215	Flange Size: 3" - 10". Flange Thickness: 0.9" Maximum.	7.7 Lbs

# APPLICATIONS



## PERSONAL FALL ARREST:

Beamer® Trolley may be used in Personal Fall Arrest applications to support:

- MAXIMUM 1 Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs.
- Maximum free fall is 6', unless used in combination with equipment explicitly certified for extended free fall of up to 12'.
- Applicable D-rings: Dorsal.



## RESTRAINT:

Beamer® Trolley may be used in Restraint applications. Restraint systems:

- Prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL.
- Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs.
- No free fall is permitted.
- May only be used on surfaces with slopes up to 4/12 (vertical/horizontal).
- Applicable D-rings: Dorsal, Chest, Side, & Shoulder.



**NEED MORE INFORMATION?**

P: 1.800.466.6385 | VISIT OUR WEBSITE: [GUARDIANFALL.COM](http://GUARDIANFALL.COM)