



**GUARDIAN**<sup>®</sup>



*Northside Sales, Co.*  
Safety & Industrial Products  
800-467-9005

## CR5

Personal  
Self-Retracting Lifeline

The CR5 Personal SRL is part of Guardian's strongest lineup of SRLs in the industry. This lightweight Class 1 personal SRL can be used in a combination of either fall arrest or travel restraint applications.


**HEIGHT SAFETY.  
SIMPLIFIED.**

[guardianfall.com](http://guardianfall.com)



# CR5

## Personal Self-Retracting Lifeline

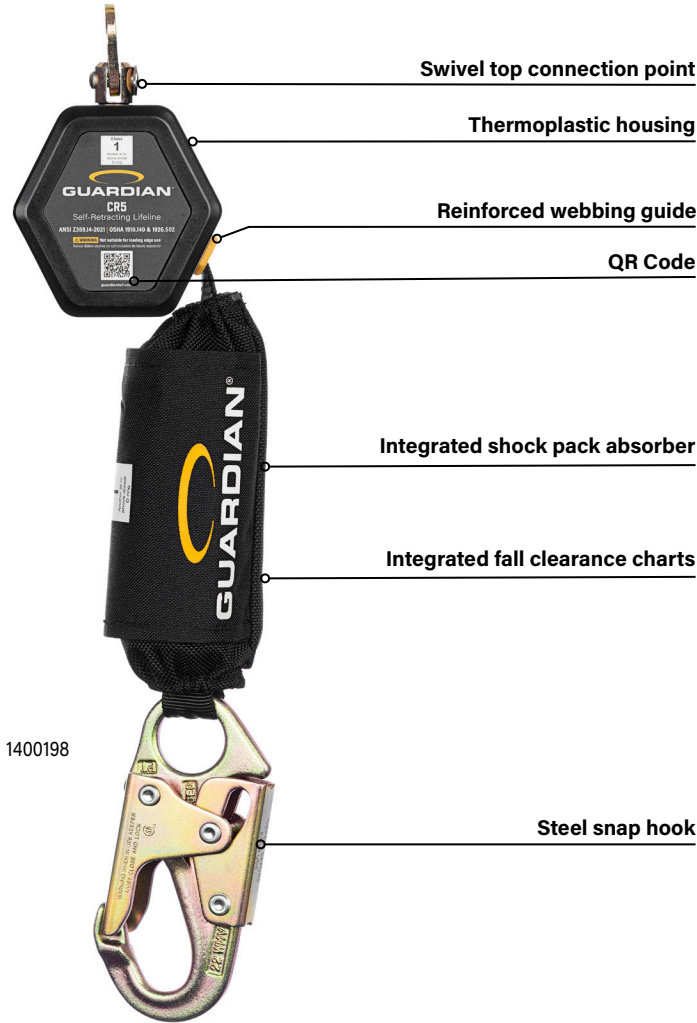

### Key features & benefits

#### Swivel top connection point

Swivels 360 degrees to ensure the device remains in the best orientation during use and also helps prevent lifeline snagging or tangling

#### Impact modified thermoplastic housing

Super lightweight & durable for long-lasting use in the toughest applications

#### Digitally enabled labels

QR code for quick and easy access to up-to-date safety and product information

#### Guardian shock pack cover

Helps increase product longevity and protect safety labeling

#### Integrated fall clearance charts

Fall clearance charts integrated into shock pack cover for easy access to clearance charts anytime, anywhere

#### Reinforced webbing guide

Added strength and reduces webbing friction

#### Multiple hook options available

Choose steel or aluminum snap or rebar hooks, depending on job requirements and anchorage type

### Specifications

**Class 1 SRL (ANSI Z359.14-2021)**

**Length** | 6 ft

**Average Arrest Force** | 1,150 lb

**Maximum Arrest Force** | 1,350 lb

**Maximum Arrest Distance** | 3' (100-420 lb)

**Type** | SRL-P

**Materials** | Polyester, Impact Modified Thermoplastic resin, HMPE Webbing, Steel, Aluminum

### Hook Options



Steel snap hook



Steel rebar hook



Aluminum snap hook



Aluminum rebar hook

### Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI Z359.7.

This product is compliant with the following safety regulations:  
**ANSI Z359.14-2021 | OSHA 1910.140 & 1926.502**

For more information:

**+1 (800) 466 6385**

**info@guardianfall.com**



Designed and tested in the **United States**

# CR5

## Personal Self-Retracting Lifeline



Part number (s)	Description	Hook type	Length	OSHA User Weight Range	ANSI User Weight Range
1400198	CR5 web SRL-P	Steel snap hook	6'	100-420 lb	130-310 lb
1400199	CR5 web SRL-P	Steel rebar hook	6'	100-420 lb	130-310 lb
1400200	CR5 web SRL-P	Steel tie-back hook	6'	100-420 lb	130-310 lb
1400201	CR5 web SRL-P	Aluminum snap hook	6'	100-420 lb	130-310 lb
1400202	CR5 web SRL-P	Aluminum rebar hook	6'	100-420 lb	130-310 lb
1400203	CR5 double web SRL-P	Steel snap hook	6'	100-420 lb	130-310 lb
1400204	CR5 double web SRL-P	Steel rebar hook	6'	100-420 lb	130-310 lb
1400205	CR5 double web SRL-P	Steel tie-back hook	6'	100-420 lb	130-310 lb
1400206	CR5 double web SRL-P	Aluminum snap hook	6'	100-420 lb	130-310 lb
1400207	CR5 double web SRL-P	Aluminum rebar hook	6'	100-420 lb	130-310 lb

### Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI Z359.7.

This product is compliant with the following safety regulations:  
**ANSI Z359.14-2021 | OSHA 1910.140 & 1926.502**

For more information:

**+1 (800) 466 6385**  
**info@guardianfall.com**



Designed and tested in the  
**United States**