

**GUARDIAN**[®]



Northside Sales, Co.

Safety & Industrial Products

800-467-9005

CR3-EDGE

Personal Self-Retracting
Lifeline

The new CR3-Edge Personal SRL can be used for numerous applications across the jobsite where the connecting device has potential to impact the edge of the hazard in the event of a fall. This robust Class 2 SRL offers a durable and compact design to keep workers safe in the most extreme conditions.

Class

2

Anchor above
or below dorsal
D-ring

**HEIGHT SAFETY.
SIMPLIFIED.**

guardianfall.com




CR3-EDGE

Personal Self-Retracting Lifeline



Class
2
Anchor above
or below dorsal
D-ring

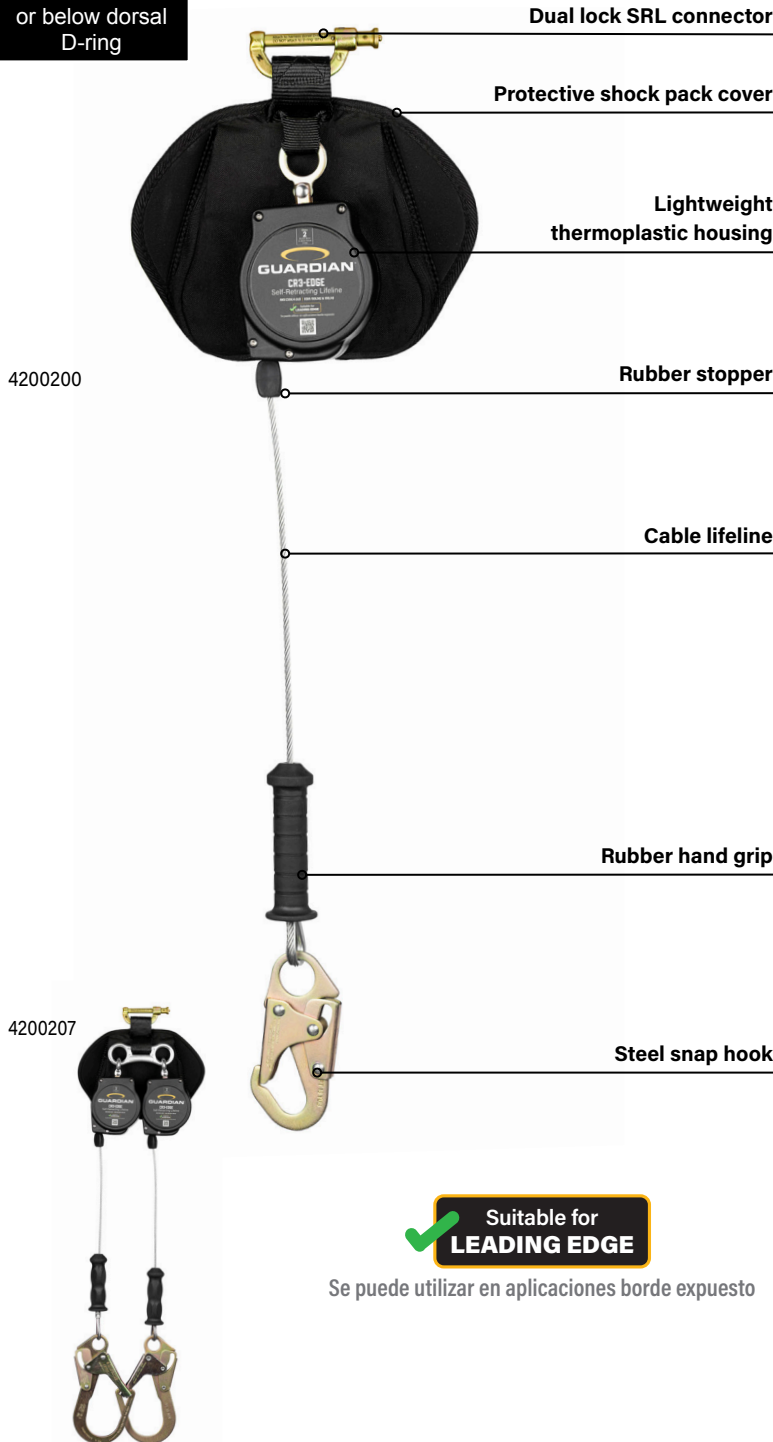

Suitable for **LEADING EDGE**

Se puede utilizar en aplicaciones borde expuesto

Key features & benefits

Dual lock SRL connector

Provides quick and easy installation onto most full body harnesses

Protective shock pack cover

Acts as cushion between the housing and worker to increase comfort

Lightweight thermoplastic housing

Durable construction for long-lasting use in the toughest conditions

Rubber stopper

Ensures enough lifeline is accessible at all times

Cable lifeline

Resists cuts and abrasions

Rubber hand grip

Ergonomic handle for increased comfort

Multiple hook options available

Choose steel or aluminum snap or rebar hooks, depending on job requirements and anchorage type

Specifications

User weight range (including tools and equipment) | ANSI 130-310 lb | OSHA 100-310 lb (LE) | OSHA 100-420 LB (NON-LE)

Max. Arresting Force | 1,350 lb

Ave. Arresting Force | 1,150 lb

Min. Setback Distance from edge | 0" (LE)

Max. Arresting Distance | 9'6" (LE)

(NON-LE) ANSI 130-310 lb, 3' | OSHA 100-310 lb, 3' | OSHA 311-420 lb, 3'6"

Min. Required Fall Clearance | At or Above

D-Ring (NON-LE) 100-310 lb, 6'6" | 311-420, 7' |

Below D-Ring (LE) 100-310, 18'

Max. Allowable Free Fall | 5'

Materials | Polyester, nylon, stainless steel

Lifeline Material | Galvanized steel cable

Length | 8'

Hook Options



Steel snap hook



Steel rebar hook



Aluminum snap hook



Aluminum rebar hook

Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by **ANSI Z359.7**

This product is compliant with the following safety regulations and consensus standard:

OSHA 1910.140 & 1926.502 | ANSI Z359.14-2021

For more information:

+1 (800) 466 6385


info@guardianfall.com



Assembled and tested in the **United States**

CR3-EDGE

Personal Self-Retracting Lifeline



Part number(s)	Description	Hook type	Length	OSHA User Weight Range	ANSI User Weight Range
4200200	CR3 SRL-P, Single, Class 2	Steel snap hook	8 ft	100-420 lb	130-310 lb
4200201	CR3 SRL-P, Single, Class 2	Aluminum snap hook	8 ft	100-420 lb	130-310 lb
4200202	CR3 SRL-P, Single, Class 2	Steel rebar hook	8 ft	100-420 lb	130-310 lb
4200203	CR3 SRL-P, Single, Class 2	Aluminum rebar hook	8 ft	100-420 lb	130-310 lb
4200204	CR3 SRL-P, Single, Class 2	Tie-back hook	8 ft	100-420 lb	130-310 lb
4200205	CR3 SRL-P, Dual, Class 2	Steel snap hook	8 ft	100-420 lb	130-310 lb
4200206	CR3 SRL-P, Dual, Class 2	Aluminum snap hook	8 ft	100-420 lb	130-310 lb
4200207	CR3 SRL-P, Dual, Class 2	Steel rebar hook	8 ft	100-420 lb	130-310 lb
4200208	CR3 SRL-P, Dual, Class 2	Aluminum rebar hook	8 ft	100-420 lb	130-310 lb
4200209	CR3 SRL-P, Dual, Class 2	Tie-back hook	8 ft	100-420 lb	130-310 lb

Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by **ANSI Z359.7**

This product is compliant with the following safety regulations and consensus standard:
OSHA 1910.140 & 1926.502 | ANSI Z359.14-2021

For more information:

+1 (800) 466 6385

info@guardianfall.com



Assembled and
tested in the
United States