


3-WAY RESCUE & RETRIEVAL SELF-RETRACTING LIFELINE

TECHNICAL DATA & SELL SHEET - ISSUE 1

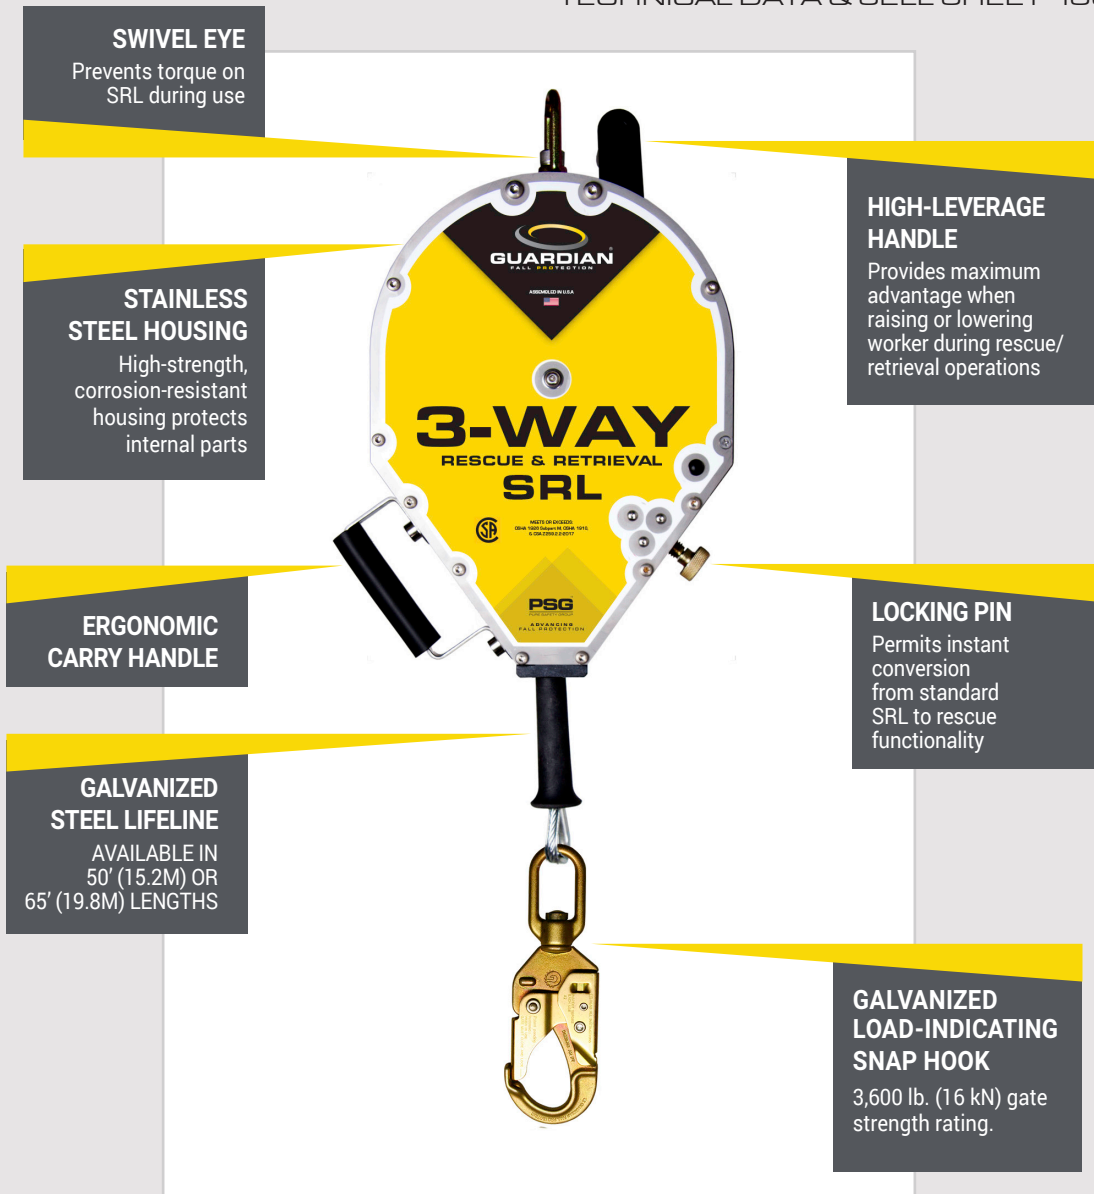

SWIVEL EYE

Prevents torque on SRL during use

STAINLESS STEEL HOUSING

High-strength, corrosion-resistant housing protects internal parts

HIGH-LEVERAGE HANDLE

Provides maximum advantage when raising or lowering worker during rescue/retrieval operations

ERGONOMIC CARRY HANDLE

GALVANIZED STEEL LIFELINE

AVAILABLE IN 50' (15.2M) OR 65' (19.8M) LENGTHS

LOCKING PIN

Permits instant conversion from standard SRL to rescue functionality

GALVANIZED LOAD-INDICATING SNAP HOOK

3,600 lb. (16 kN) gate strength rating.

Lifeline: Galvanized Steel

Snap Hook: Galvanized Steel

Capacity: ANSI: 130-310 lbs. (59-190 kg.); OSHA & CSA: 100-310 lbs. (45-190kg.)

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**

3-WAY RESCUE & RETRIEVAL SELF-RETRACTING LIFELINE

TECHNICAL DATA & SELL SHEET - ISSUE 1

Standards

- OSHA 1926 Subpart M
- OSHA 1910
- ANSI Z359.14-2014
- ANSI A10.32-2012
- CSA Z259.2.2-2017



Performance:

- Maximum Users: 1
- Maximum Arrest Force: 1,800 lbs.(8 kN.)

Notes:

- Always maintain 100% tie-off.

Applications



Personal Fall Arrest: 3-Way SRL may be used to support a MAXIMUM 1 Personal Fall Arrest System (PFAS) for use in Fall Arrest applications. Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs. (22.2 kN). No free fall is permitted. Applicable D-ring: Dorsal.



Restraint: 3-Way SRL may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. (4.4 kN). No free fall is permitted. Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, Shoulder.



Rescue/Confined Space: 3-Way SRL may be used in Rescue/Confined Space applications. Rescue systems function to safely recover a worker from a confined location or after exposed to a fall. There are various configurations of Rescue systems depending on the type of rescue. Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs. (13.3 kN). No free fall is permitted. Applicable D-rings: Dorsal, Chest, Shoulder.

HOOK TYPES



Steel Snap Hook

Prod. Code	Description	Length
10974/10974CSA	3-Way Rescue & Retrieval SRL-R with Steel Snap Hook	50' (15.2m)
10981/10981CSA	3-Way Rescue & Retrieval SRL-R with Steel Snap Hook	65' (19.8m)

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**