



Northside Sales, Co.  
Safety & Industrial Products  
800-467-9005

# SMALLEST & LIGHTEST 5 GAS MONITOR

Gas Detection For Life

GX-3R Pro Model



## Features

- **Smallest & lightest 5 gas monitor**
  - 2.9" W x 2.6" H x 1.06" D , 4.58 ounces
- **Simultaneous detection of 5 gases**
  - Confined Space Gases: *LEL, O2, H2S, CO*
  - Toxic/IR Gases: *HCN, NH3, NO2, PH3, SO2, and CO2*
  - H2 Compensated CO sensor available
- **Simple 2-button operation**
- **Bluetooth communication with iOS & Android App**
- **Non-Compliance Indicator**
- **3 user adjustable alarm levels**
- **Panic Alarm**
- **Man Down Alarm**
- **Impact resistant body**
- **Large full dot, auto-backlit display with auto-rotation**
- **Stealth mode for law enforcement**
- **Field replaceable sensors & filters**
- **Water and dust resistant design, IP66/68**
- **3 Year Warranty\***

**5** World's Smallest and Lightest  
**Gas Monitor**

## Applications

- **Personal monitoring**
- **Confined spaces**
- **Refineries / petrochemical**
- **Utilities**
- **Oil and Gas**
- **Water / wastewater**
- **Fire services**
- **Construction**


The GX-3R Pro is the world's smallest 5-gas monitor weighing only 4.58 ounces and fits in the palm of your hand (2.9" W x 2.6" H x 1.06" D). It simultaneously monitors and displays 5 different gases. In addition to monitoring standard confined space gases, LEL, O2, CO, & H2S, the GX-3R Pro has a 5th channel where you can add infrared or toxic gas sensors. Two of the four sensor slots have interchangeable sensors providing flexible configurations, which can easily be changed in the field.

The GX-3R Pro comes equipped with Bluetooth wireless communication, man-down alarm, the choice of alkaline or rechargeable power supply, and a 3 year warranty. The Lithium-ion battery pack will operate for 25 hours and will fully charge in 3 hours.

The GX-3R Pro utilizes Bluetooth communication to display direct gas readings from the instrument to a phone app, which is available free on either iOS or Android phones. Automatic notifications can be programmed to send text or email messages if there is an alarm event from the GX-3R Pro.

Safety supervisors will appreciate the non-compliance indicator. The instrument flashes it's 3 LED lights every 30 seconds in the following conditions; if the instrument has not been bump tested, or if calibration is due, or if there was a gas alarm event. The 3 LED lights will continue to flash once every 30 seconds until the non-compliance condition has been resolved. The 30 second interval is adjustable.

\* 3 year warranty on material and workmanship including sensors (1 year for Ammonia sensor)

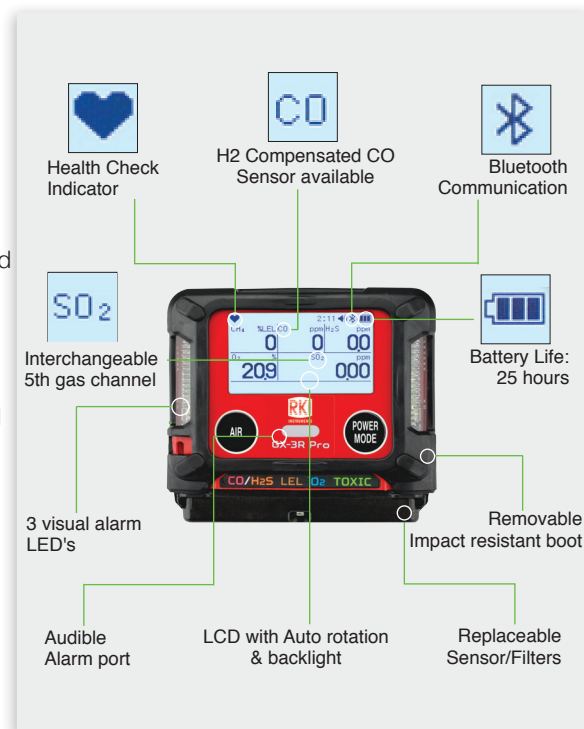

RKI Instruments, Inc. • 33248 Central Ave. Union City, CA 94587 • Phone (510) 441-5656 • (800) 754-5165 • Fax (510) 441-5650

World Leader In Gas Detection & Sensor Technology  
www.rkiinstruments.com

# GX-3R Pro Model

Detectable Gases				Common Specifications																					
Gas	Measuring Range (Increments)	Accuracy Statement	Preset Alarms		Sampling Method	Diffusion sampling standard (hand aspirator or clip-on motorized pump optional)																			
<b>Sensor Slot 1: Carbon Monoxide (CO) &amp; Hydrogen Sulfide (H2S)</b>				<b>Display</b>				Full dot LCD with Autobacklight and Autorotation																	
H2S / CO	Dual EC	0 ~ 2000 ppm (1 ppm)	± 5% of reading or ± 5 ppm CO	A1: 25 ppm   STEL: 200 ppm A2: 50 ppm   TWA: 25 ppm A3: 1200 ppm	<b>Alarm Types</b>	<b>Gas Alarm</b>		<b>Trouble Alarm</b>																	
		0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm   STEL: 5.0 ppm A2: 30 ppm   TWA: 1.0 ppm A3: 100 ppm		<ul style="list-style-type: none"> <li>• 2 increasing alarms</li> <li>• STEL</li> <li>• TWA</li> <li>• Overscale alarm</li> <li>• O2 decreasing/increasing</li> </ul>	<ul style="list-style-type: none"> <li>• Sensor disconnection</li> <li>• Low battery</li> <li>• Circuit error</li> <li>• Calibration range error</li> <li>• Cal or bump due alarm</li> </ul>																		
H2S Only	EC	0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm   STEL: 5.0 ppm A2: 30 ppm   TWA: 1.0 ppm A3: 100 ppm	<b>Display of Alarm</b>	<b>Gas Alarm</b>		<b>Trouble Alarm</b>																	
CO H2 Compensated	EC	0 ~ 2,000 ppm	± 5% of reading or ± 2 ppm CO	A1: 25 ppm   STEL: 200 ppm A2: 50 ppm   TWA: 25 ppm A3: 1200 ppm		<ul style="list-style-type: none"> <li>• Flashing LED's</li> <li>• Continuous buzzer (100 db @ 30cm)</li> <li>• Flashing gas value</li> <li>• Vibration</li> </ul>	<ul style="list-style-type: none"> <li>• Flashing LED's</li> <li>• Intermittent buzzer (95 db @ 30cm)</li> <li>• Display of error message</li> </ul>																		
<b>Sensor Slot 2: Combustibles (Methane as standard)</b>				<b>Operating Temp. &amp; Humidity</b>				-20°C ~ +50°C [ -4°F ~ +122°F ] 10 to 90% RH, non-condensing (continuous environment) -40°C ~ +60°C [ -40°F ~ +140°F ] 0 to 95% RH, non-condensing (temporary environment)																	
CH4 / HC	Catalytic	0 ~ LEL (1% LEL)	± 5% of reading or ± 2 % LEL	1st: 10% LEL   2nd: 25% LEL 3rd: 50% LEL   Over: 100% LEL	<b>Response Time</b>	Within 30 seconds (T90)																			
<b>Sensor Slot 3: Oxygen (O2)</b>				<b>Power Source</b>				<table border="1"> <thead> <tr> <th>Config</th> <th>Li-ion</th> <th>Alkaline</th> </tr> </thead> <tbody> <tr> <td>4-gas + EC</td> <td>25 hours</td> <td>16 hours</td> </tr> <tr> <td>with BLE</td> <td>23 hours</td> <td>14 hours</td> </tr> <tr> <td>4-gas + IR</td> <td>16 hours</td> <td>7 hours</td> </tr> <tr> <td>with BLE</td> <td>15 hours</td> <td>6 hours</td> </tr> </tbody> </table>			Config	Li-ion	Alkaline	4-gas + EC	25 hours	16 hours	with BLE	23 hours	14 hours	4-gas + IR	16 hours	7 hours	with BLE	15 hours	6 hours
Config	Li-ion	Alkaline																							
4-gas + EC	25 hours	16 hours																							
with BLE	23 hours	14 hours																							
4-gas + IR	16 hours	7 hours																							
with BLE	15 hours	6 hours																							
O2	EC	0 ~ 40.0% Vol. (0.10%)	± 0.5% O2	Low 1: 19.5%   High: 23.5% Low 2: 18.0%   Over: 40.0%	<b>Dimension &amp; Weight</b>	2.9" W x 2.6" H x 1.06" D (Approx. 73 W x 65 H x 26 D mm) 4.58oz (with rubber boot)																			
<b>Sensor Slot 4: Toxics &amp; CO2</b>				<b>Case Material</b>				Dust and water resistant to IP-66/68 (2m,1h); Drop test height 23 ft																	
HCN	EC	0 ~ 30.0 ppm (0.1 ppm)	± 10% of reading or ± 5 % of full scale	A1: 5.0 ppm   STEL: 10 ppm A2: 10.00 ppm   TWA: 4.7 ppm A3: 30.00 ppm	<b>Bluetooth Communication</b>	BLE: with iOS and Android phone app: <i>RK Link</i>																			
NH3		0 ~ 400.0 ppm (0.5 ppm)		A1: 25.0 ppm   STEL: 1.0 ppm A2: 35.0 ppm   TWA: 0.30 ppm A3: 300.0 ppm		<b>Datalogging</b>	Logs user ID, station ID, Calibration & Bump Test history, Alarm Events & Alarm Trends																		
NO2		0 ~ 20.00 ppm (0.05 ppm)		A1: 2.00 ppm   STEL: 25.0 ppm A2: 4.00 ppm   TWA: 35.0 ppm A3: 20.00 ppm			<b>Standard Accessories</b>	Alligator clip, protective rubber boot, charger, calibration adapter																	
PH3		0 ~ 20.00 ppm (0.01 ppm)		A1: 0.30 ppm   STEL: 1.0 ppm A2: 0.60 ppm   TWA: 0.30 ppm A3: 0.60 ppm				<b>Optional Accessories</b>	<ul style="list-style-type: none"> <li>• Padded carrying case</li> <li>• RP-3R Attachable sampling pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available)</li> <li>• USB to IrDA downloading cable for datalogger</li> <li>• SDM-3R calibration station</li> <li>• Hand aspirator</li> </ul>																
SO2		0 ~ 100.0 ppm (0.05 ppm)		A1: 2.00 ppm   STEL: 5.0 ppm A2: 5.00 ppm   TWA: 2.00 ppm A3: 100.00 ppm					<b>Approvals</b>	ATEX, CSA															
CO2 %		0 ~ 10.0% Vol. (0.01%)		A1: 0.50% Vol.   STEL: 3.00% Vol. A2: 3.00% Vol.   TWA: 0.50% Vol. A3: 4.00% Vol.						<b>Warranty</b>	3 years material and workmanship including sensors (1 year for Ammonia sensor)														
CO2 ppm	0 ~ 10,000 ppm (20 ppm)	A1: 5,000 ppm   STEL: N/A A2: N/A   TWA: N/A																							

Calibration Station  
**SDM-3R**



Clip-On Sampling Pump  
**RP-3R**



\*Specifications subject to change without notice



**INSTRUMENTS**  
Gas Detection For Life

(800) 754-5165

www.rkiinstruments.com

## Authorized Distributor: